
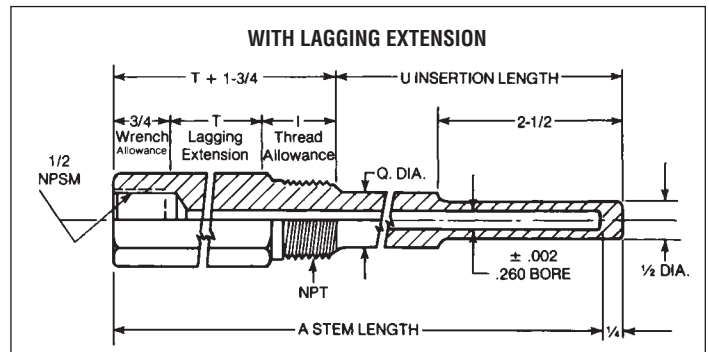


FOR INDUSTRIAL BIMETAL THERMOMETERS WITH .250" DIAMETER ELEMENTS

- .385" bore available for use with instruments with .375" diameter elements
- All Weksler standard thermowells are bored from solid bar stock

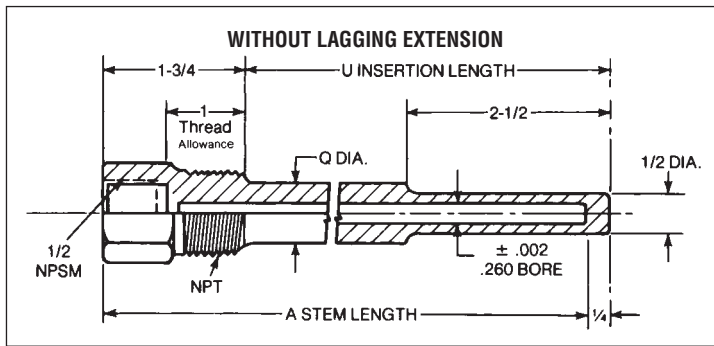

3/4 NPT – CATALOG NUMBERS						
A	U	Q	BRASS	STEEL	304 SS	316 SS
4	2 1/2	—	S3B4	S3S4	S3G4	S3J4
6	4 1/2	3/4	S3B6	S3S6	S3G6	S3J6
9	7 1/2	3/4	S3B9	S3S9	S3G9	S3J9
12	10 1/2	3/4	S3B2	S3S2	S3G2	S3J2
15	13 1/2	3/4	S3B5	S3S5	S3G5	S3J5
18	16 1/2	3/4	S3B8	S3S8	S3G8	S3J8
24	22 1/2	3/4	S3BT	S3ST	S3GT	S3JT

3/4 NPT – CATALOG NUMBERS							304 SS	316 SS
A	U	T	Q	BRASS	STEEL			
6	2 1/2	2	—	L3B6	L3S6	L3G6	L3J6	
9	4 1/2	3	3/4	L3B9	L3S9	L3G9	L3J9	
12	7 1/2	3	3/4	L3B2	L3S2	L3G2	L3J2	
15	10 1/2	3	3/4	L3B5	L3S5	L3G5	L3J5	
18	13 1/2	3	3/4	L3B8	L3S8	L3G8	L3J8	
24	19 1/2	3	3/4	L3BT	L3ST	L3GT	L3JT	

1 NPT – CATALOG NUMBERS						
A	U	Q	BRASS	STEEL	304 SS	316 SS
4	2 1/2	—	S4B4	S4S4	S4G4	S4J4
6	4 1/2	7/8	S4B6	S4S6	S4G6	S4J6
9	7 1/2	7/8	S4B9	S4S9	S4G9	S4J9
12	10 1/2	7/8	S4B2	S4S2	S4G2	S4J2
15	13 1/2	7/8	S4B5	S4S5	S4G5	S4J5
18	16 1/2	7/8	S4B8	S4S8	S4G8	S4J8
24	22 1/2	7/8	S4BT	S4ST	S4GT	S4JT

1 NPT – CATALOG NUMBERS							304 SS	316 SS
A	U	T	Q	BRASS	STEEL			
6	2 1/2	2	—	L4B6	L4S6	L4G6	L4J6	
9	4 1/2	3	7/8	L4B9	L4S9	L4G9	L4J9	
12	7 1/2	3	7/8	L4B2	L4S2	L4G2	L4J2	
15	10 1/2	3	7/8	L4B5	L4S5	L4G5	L4J5	
18	13 1/2	3	7/8	L4B8	L4S8	L4G8	L4J8	
24	19 1/2	3	7/8	L4BT	L4ST	L4GT	L4JT	

Brass wells are not recommended for installations involving high pressures and/or temperatures over 400°F. Brass cap and chain available to keep bore clean when not in use. .260" bore standard. If .385" bore is required:
 (1) Add the letter K at the end of the catalog no.;
 (2) "Q" diameter is changed to 49/64" along entire length of insertion ("U" dimension).
 For pressure – temperature rating use Table 1 on page 89.

NOTE: 2 1/2" STEM THERMOMETERS USE SPECIAL LIMITED SPACE WELLS.