

STANDARD FEATURES

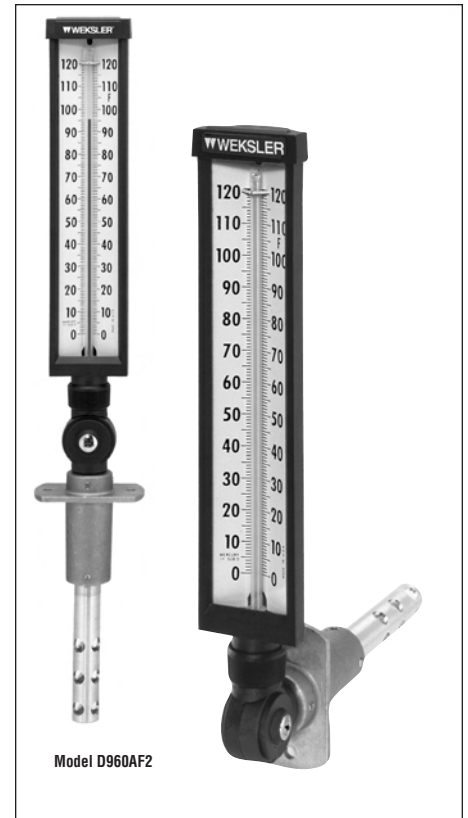
- Mercury Free.
- Molded Valox® – V-shaped black case supplied as standard.
- Glass front excludes dust and dirt.
- White aluminum scale with bold black graduations and flanges.
- Mercury Free blue liquid in glass with magnifying lens for easy readability.
- Accuracy is $\pm 1\%$ of full scale.
- Easy adjustment permits case and stem to be rotated 360°.
- 3½", 6", 9" & 12" stems available.
- Protective slotted bulb guard, ¾" diameter aluminum stem and 3" diameter union flange

OPTIONS

- Plastic window available for both 7" and 9" scale.
- Lagging extension.
- Aluminum case.

RANGES

MINOR FAHRENHEIT	RANGE GRADS	CODE
-40/110F	2°	F1
0/120F	1°	F2
0/160F	2°	F3
30/180F	2°	F4
30/240F	2°	F5
CELSIUS		
-20/45C	1°	C1
0/50C	1°	C2
0/100C	1°	C3
DUAL SCALE		
-40/110F & -40/43C	2°	D1
0/120F & -15/48C	1°	D2
0/160F & -15/70C	2°	D3
30/180F & 0/82C	2°	D4
30/240F & 0/115C	2°	D5


HOW TO ORDER

- D** **9** **60** **A** **F2** — **AL**
1. Product Type:
A = Air Duct Thermometer
 2. Scale Size: 7 = 7" Scale; 9 = 9" Scale
 3. Stem Length: 35 = 3½"; 60 = 6"; 90 = 9"; 12 = 12"
 4. Connection Location: A = Adjust Angle
 5. Range (see table)
 6. Options: PD = Plastic Window