

**Navy/Marine Thermometer**


**STANDARD FEATURES**

- Molded Valox® – V-shaped gray case.
- White aluminum scale with bold black graduations and flanges.
- 2" stem.
- 3/4" overall length thermowell (optional) to be used with 2" stem.
- Red reading with magnifying lens for easy readability.


RANGES		
DUAL SCALE	MINOR GRADS	RANGE CODE
-40/110F & -40/43C	2°/2°	D1
20/180F & -5/80C	2°/2°	DØ
30/240F & 0/115C	2°/2°	D5
50/400F & 10/200C	5°/2°	D7

PART NUMBERS*	
CONNECTION LOCATION	STEM LENGTH
	2"
Lower	S520L
Back	S520R

\*Include range code (above) at end of above # to complete the part number.

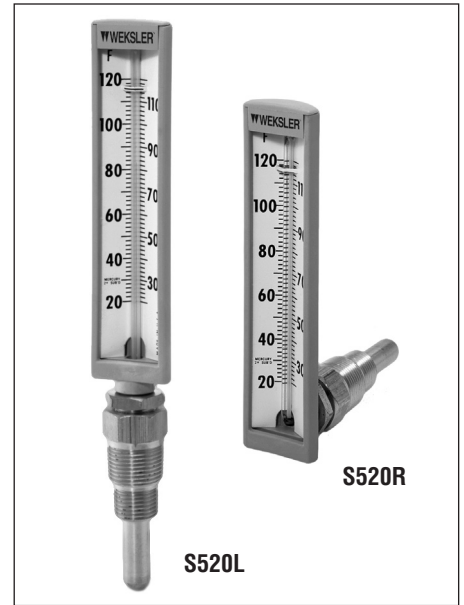

THERMOWELL DIMENSIONS – 3/4"-28" Female Thread (Internal)				
WELL CLASS	STEM LENGTH OF THERMOMETER	OVERALL LENGTH OF WELL	CATALOG #	
			BRASS	304SS
a	2 inch	3 1/4"	N/A	W3G1
c	2 inch	3 1/4"	W3B3	N/A

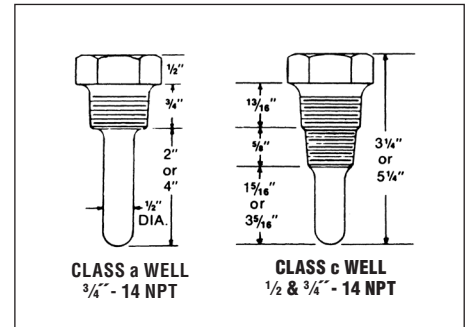

**Economy Thermometer**

**STANDARD FEATURES**

- Molded Valox® – V-shaped gray case.
- Red reading spirit filled tube with magnifying lens for easy readability.
- 40/260F and 5/125C is standard range (2°F divisions and 1°C divisions)
- White aluminum scale with bold black graduations and figures.
- 2" stem supplied as standard.
- Supplied standard with removable 1/2 NPT brass well, 2" length (1.375" insertion).

PART NUMBERS	
CONNECTION LOCATION	2" STEM
Lower	E520L
Back	E520R

